



Technical Library


36 Way 5mm Pitch Terminal Details

RS Stock No.
433-163
433-157
433-179

RS 433-163 pcb mount male, 433-157 Female 36 way, RS 433-179 polarising clips together comprising a 5mm pitch plugable Terminal system

Specification

Rating	10A/380V
Dielectric Strength	>5kV
Insulation Resistance	> 40 Mohm
Working Temperature	110 deg C
Short period	160 deg C
Moulding	UL94-V0 flame retardent Lexan
Pin/Terminal	5 micron tinned nickel plated brass
Rising clamp	Tinned nickel plated steel
Screw	M 2.5 steel, 8 micron zinc colour passivated and tropicalised
Wire acceptance	3.5mm ²

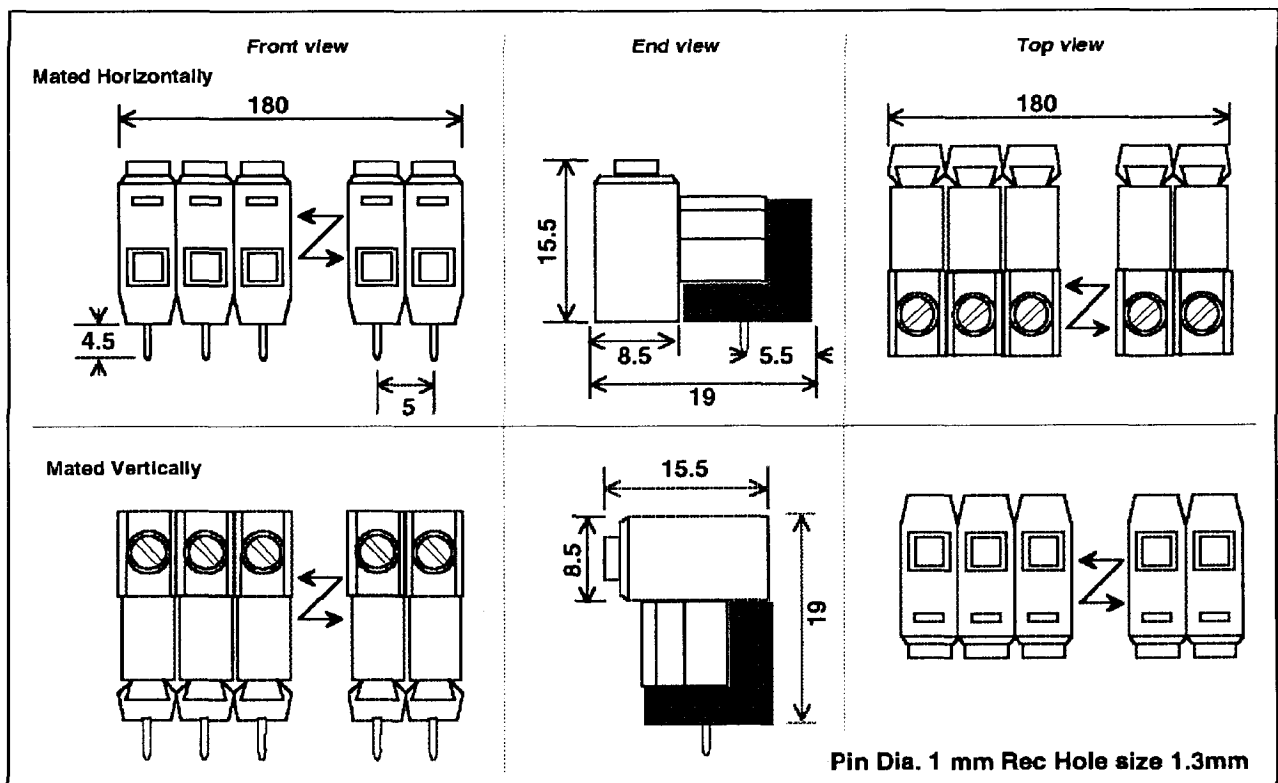

RS Components shall not be liable for any liability or loss of any nature (howsoever caused and whether or not due to RS components' negligence) which may result from the use of any information provided in RS literature.